


### Product Image



### Product Dimensions

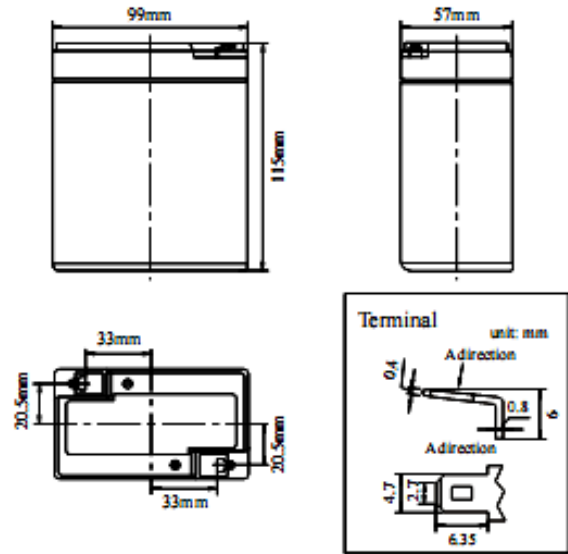

### Characteristics

Nominal Voltage		6V
Nominal Capacity (20 hour rate)		8.5Ah
Capacity 25°C (77°F)	10 hour rate (0.81A)	8.1Ah
	5 hour rate (1.51A)	7.55Ah
	1 hour rate (5.61A)	5.61Ah
Internal Resistance	Full Charged Battery 25°C	≤14m Ω
Capacity affected by Temperature (10 hour)	40°C (104°F)	102%
	25°C (77°F)	100%
	0°C (32°F)	85%
Self-Discharge 25°C (77°F)	after 3 month storage	90%
	after 6 month storage	80%
Capacity	after 12 month storage	62%
Charge (Constant Voltage) 25°C (77°F)	Float	Initial Charging Current Less than 2.5A Voltage 6.8-6.9V
	Cycle	Initial Charging Current Less than 2.5A Voltage 7.2-7.5V

### Packaging

Battery Dimensions	Length	99mm
	Width	57mm
	Height	115mm
Box Dimensions	Total Height	115mm
	Length	330mm
	Width	219mm
	Height	161mm
Quantity Per Box		10 pcs per box
Net weight Per Cell		1.38 kg±50g
Net weight Per Box		13.8kg
Gross Weight		14.3kg

#### Discharge Constant Current per Cell (Amperes at 77°F25°C)







F.V/Time	5min	10min	15min	30min	45min	1h	2h	3h	5h	8h	10h	20h
1.60V	28.05	18.70	14.07	9.35	6.55	5.61	3.51	2.40	1.60	1.08	0.89	0.47
1.65V	27.54	18.36	13.81	9.18	6.43	5.51	3.44	2.36	1.57	1.06	0.87	0.46
1.70V	27.03	18.02	13.56	9.01	6.31	5.41	3.38	2.32	1.54	1.04	0.86	0.45
1.75V	26.52	17.68	13.30	8.84	6.19	5.30	3.32	2.27	1.51	1.02	0.84	0.44
1.80V	25.50	17.00	12.79	8.50	5.95	5.10	3.19	2.18	1.46	0.98	0.81	0.43

#### Discharge Constant Power per Cell (Watts at 77°F 25°C)

F.V/Time	5min	10min	15min	30min	45min	1h	2h	3h	5h	8h	10h	20h
1.60V	54.00	36.00	27.09	18.00	12.60	10.80	6.75	4.63	3.08	2.07	1.71	0.90
1.65V	53.01	35.34	26.59	17.67	12.37	10.60	6.63	4.54	3.03	2.04	1.68	0.88
1.70V	52.03	34.69	26.10	17.34	12.14	10.41	6.50	4.46	2.97	2.00	1.65	0.87
1.75V	51.05	34.03	25.61	17.02	11.91	10.21	6.38	4.37	2.92	1.96	1.62	0.85
1.80V	49.09	32.73	24.62	16.36	11.45	9.82	6.14	4.21	2.80	1.88	1.56	0.82

**Note** The above data are average values, and can be obtained within 3 charge/discharge cycles. These are not minimum values. Cell and battery designs/specifications are subject to modification without notice. Contact **MCA** for the latest information.

## Performance Characteristics

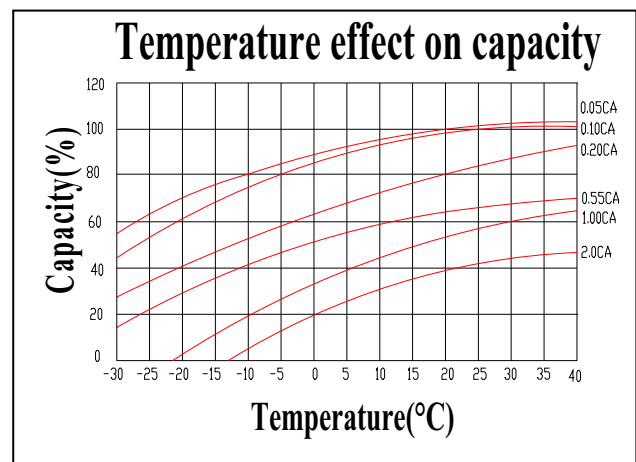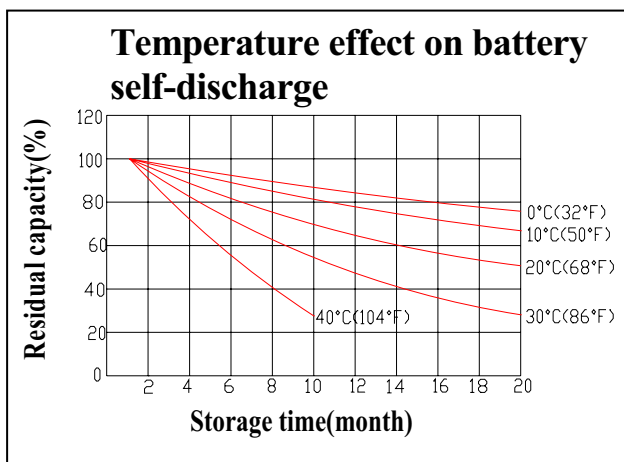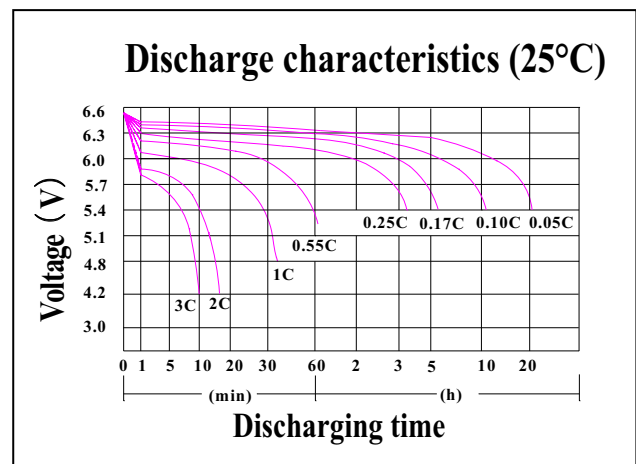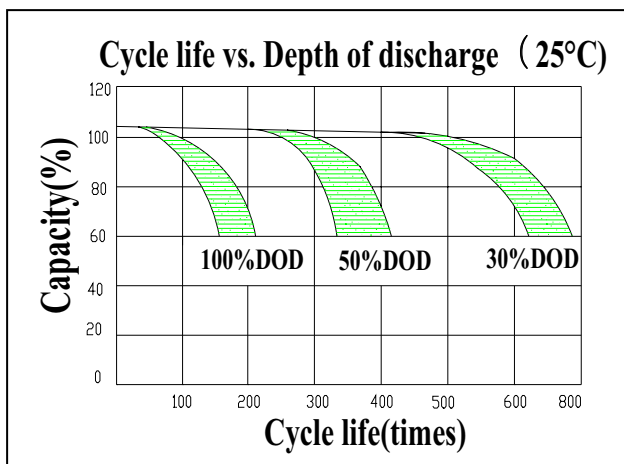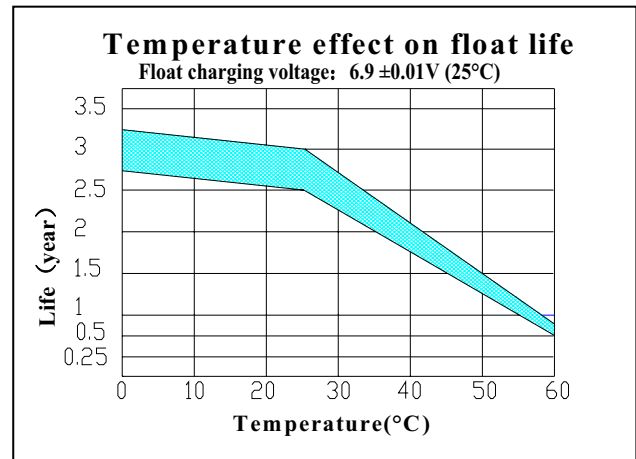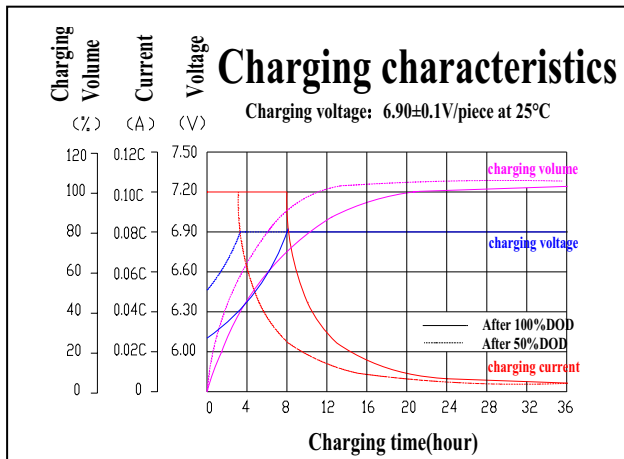

## Battery Construction

Component	Positive plate	Negative plate	Container	Cover	Safety valve	Terminal	Separator	Electrolyte
Raw material	Lead dioxide	Lead	ABS	ABS	Si-Rubber	Copper	Fiberglass	Sulfuric acid