


Product Image



Product Dimensions

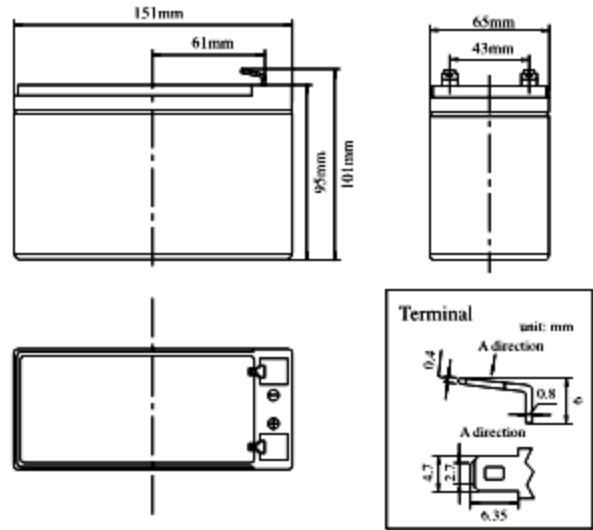

Characteristics

Nominal Voltage		12V
Nominal Capacity (20 hour rate)		6.5Ah
Capacity 25°C (77°F)	10 hour rate (0.62A)	6.2Ah
	5 hour rate (1.16A)	5.8Ah
	1 hour rate (4.29A)	4.29Ah
Internal Resistance	Full Charged Battery 25°C	≤24m Ω
Capacity affected by Temperature (10 hour)	40°C (104°F)	102%
	25°C (77°F)	100%
	0°C (32°F)	85%
	-15°C (5°F)	65%
Self-Discharge 25°C (77°F) Capacity	after 3 month storage	90%
	after 6 month storage	80%
	after 12 month storage	62%
Charge (Constant Voltage) 25°C (77°F)	Float	Initial Charging Current Less than 1.95A Voltage 13.6-13.8V
	Cycle	Initial Charging Current Less than 1.95A Voltage 14.4-15.0V

Packaging

Battery Dimensions	Length	151mm
	Width	65mm
	Height	95mm
	Total Height	101mm
Box Dimensions	Length	364mm
	Width	165mm
	Height	141mm
Quantity Per Box		5 PC per box
Net weight Per Cell		2.0 kg±100g
Net weight Per Box		10.0kg
Gross Weight		10.4kg

Discharge Constant Current per Cell (Amperes at 77°F 25°C)







F.V/Time	5min	10min	15min	30min	45min	1h	2h	3h	5h	8h	10h	20h
1.60V	21.45	14.30	10.76	7.15	5.01	4.29	2.68	1.84	1.23	0.82	0.68	0.36
1.65V	21.06	14.04	10.56	7.02	4.91	4.21	2.63	1.80	1.20	0.81	0.67	0.35
1.70V	20.67	13.78	10.37	6.89	4.82	4.13	2.58	1.77	1.18	0.79	0.66	0.34
1.75V	20.28	13.52	10.17	6.76	4.73	4.06	2.54	1.74	1.16	0.78	0.64	0.34
1.80V	19.50	13.00	9.78	6.50	4.55	3.90	2.44	1.67	1.11	0.75	0.62	0.33

Discharge Constant Power per Cell (Watts at 77°F 25°C)

F.V/Time	5min	10min	15min	30min	45min	1h	2h	3h	5h	8h	10h	20h
1.60V	41.29	27.53	20.71	13.76	9.63	8.26	5.16	3.54	2.36	1.59	1.31	0.69
1.65V	40.54	27.03	20.34	13.51	9.46	8.11	5.07	3.47	2.32	1.56	1.29	0.68
1.70V	39.79	26.53	19.96	13.26	9.28	7.96	4.97	3.41	2.27	1.53	1.26	0.66
1.75V	39.04	26.03	19.58	13.01	9.11	7.81	4.88	3.34	2.23	1.50	1.24	0.65
1.80V	37.54	25.03	18.83	12.51	8.76	7.51	4.69	3.22	2.14	1.44	1.19	0.63

Note The above data are average values, and can be obtained within 3 charge/discharge cycles. These are not minimum values. Cell and battery designs/specifications are subject to modification without notice. Contact **MCA** for the latest information.

Performance Characteristics

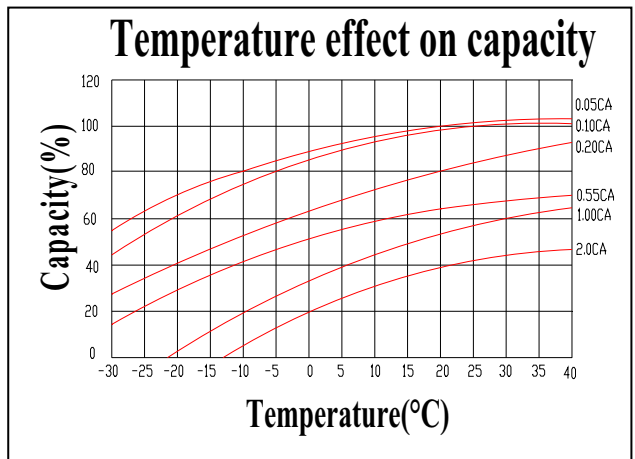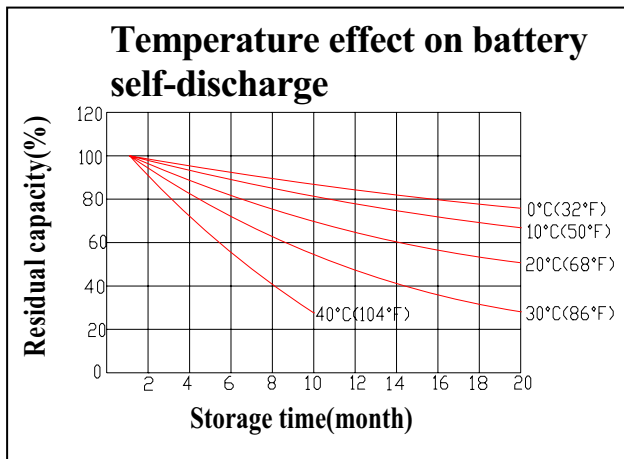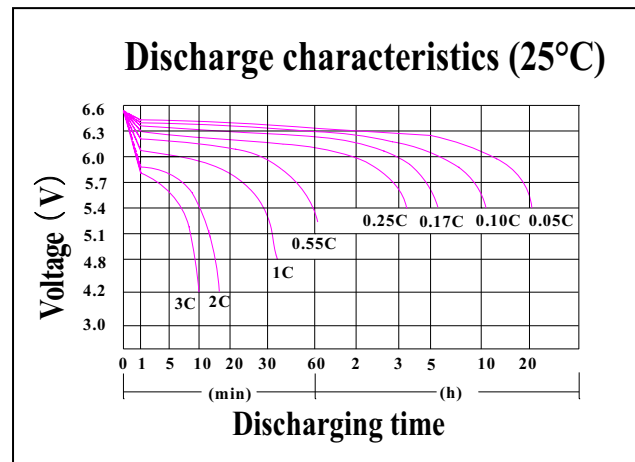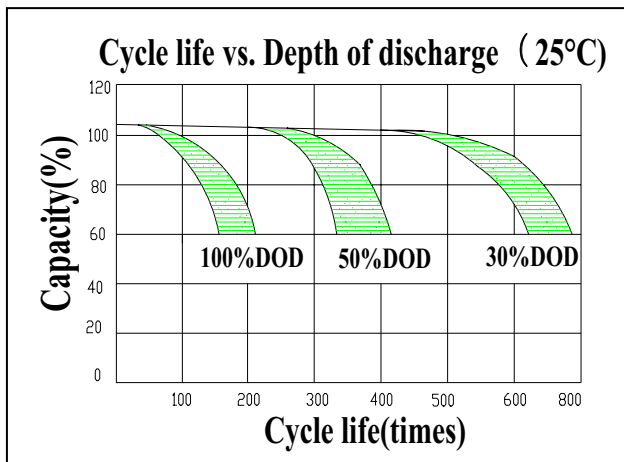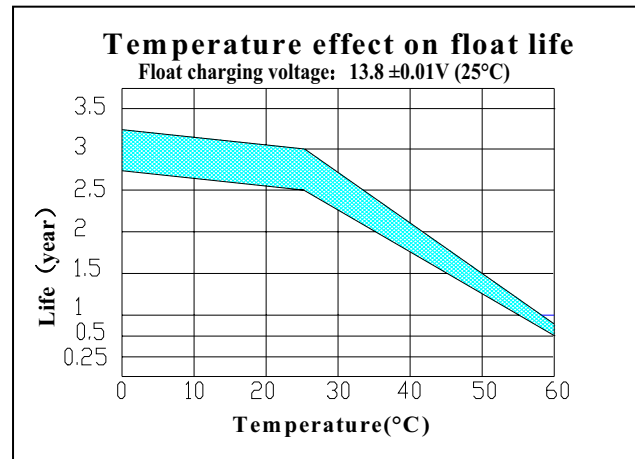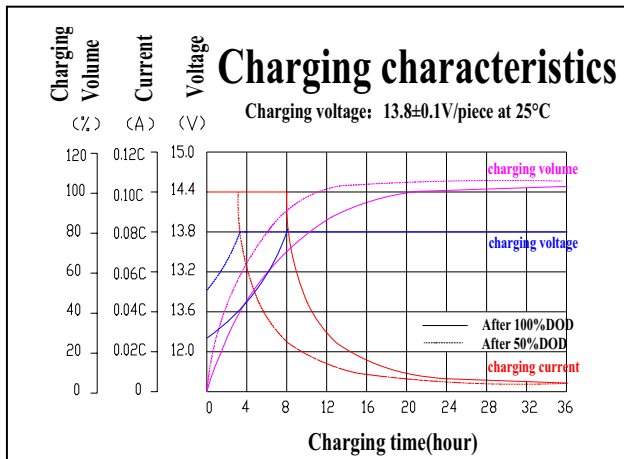

Battery Construction

Component	Positive plate	Negative plate	Container	Cover	Safety valve	Terminal	Separator	Electrolyte
Raw material	Lead dioxide	Lead	ABS	ABS	Si-Rubber	Copper	Fiberglass	Sulfuric acid